



LIGHTWEIGHT, DURABLE S Series

Spring Driven Composite Reels

S Series - 3/8", 1/2" I.D. & Welding Reels

The S Series is economical, durable and lightweight utilizing a practical combination of the latest composite materials and metals with applications including water, air, hot wash (pre-rinse), chemical delivery and oxygen acetylene.

A unique combination of composites & metals

The tough composite poly-propylene outer case houses solid brass swivel and fluid path, a steel main shaft and high quality spring steel motor.

Corrosion-resistant & durable

The tough composite poly-propylene outer case is UV stabilized and resistant to most acids and alkalis with excellent impact resistance making these reels suitable not only for general applications but also for environments where corrosion is an issue.

Positive latching system

The design of the latching system ensures positive latching in any mounting position.

Unique mounting

The mounting bracket system supplied with the reel allows for mounting in any position with the advantage of the swivel feature standard.

Lighter Weight

Pound for pound the S series offers distinct weight advantages due to the composite case construction.



Arbor Farms Nursery, Fort Wayne, Indiana




SGA3650 OLP



SGA3650 OLP

Shown with mounting brackets and optional wire stand #S261398

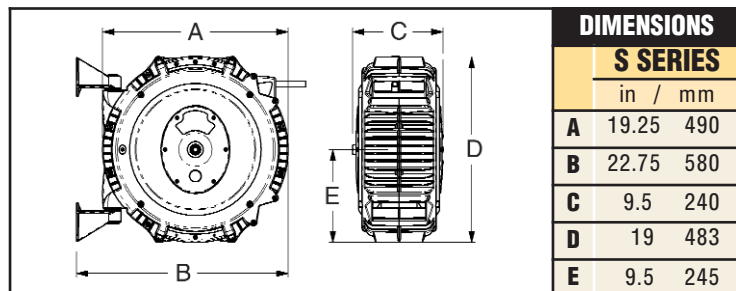

Composite / S Series

- ✓ Combination Air/Water
- ✓ Water Service
- ✓ Hot Water Wash
- ✓ Chemical Delivery
- ✓ Oxygen Acetylene

SPECIFICATIONS

MODEL (with hose)	WEIGHT lbs / kg	PRESSURE psi / bar	I.D. in / mm	O.D. in / mm	LENGTH ft / m	(M)NPTF	(F)NPTF
						HOSE OUTLET in	REEL INLET in
AIR* & WATER* REELS Working Temperature 150° F (65° C).							
SGA3650 OLP	23 10	232 16	3/8 10	.621 16	50 15	3/8	3/8
SGA3665 OLP	27 12	232 16	3/8 10	.621 16	66 20	3/8	3/8
SGA3850 OLP	27 12	232 16	1/2 13	.781 20	50 15	1/2	1/2
WATER REEL Garden-style hose end. Working Temperature 150° F (65° C).							
SWA3850 OLP	27 12	145 10	1/2 13	.750 19	50 15	3/4 NH	1/2
HOT WATER WASH REEL NOTE: Working Temperature 185° F (85° C). Working pressure is related to working temperature.							
SHA3850 OLP	27 12	232 16	1/2 13	.781 20	50 15	1/2	1/2
CHEMICAL DELIVERY REEL							
SCA3850 OLP	27 12	232 16	1/2 13	.781 20	50 15	1/2	1/2
OXYGEN/ACETYLENE REEL Working Temperature 150° F (65° C).							
STW3450 OLP	27 12	300 21	1/4 6	.530 14	50 15	9/16"18(F)LH-RH	9/16"18(F)LH-RH
STW3450 OLP C dimension = 11.25" / 285mm. *NOTE: Air hose can be used for water on these models.							

Suitable for all position mounting.

Series S reels are made in Australia.

North America: 800-444-3134 Asia: +63 (45) 625-6624
Europe: +44 (0) 1536 406999 Latin America: 260-489-1685

www.reelcraft.com



Wind Things Up With Reelcraft™