



VERSATILE CONFIGURATIONS

Series 30000

DIMENSIONS & SPECS						
HOSE I.D.	1/4"	3/8"	1/2"	3/4"	1"	
	(6.35mm)	(9.53mm)	(12.70mm)	(19.05mm)	(25.40mm)	
HOSE O.D.	.530"	.688"	.854"	1.188"	1.380"	
	(13.4mm)	(17.5mm)	(21.5mm)	(30.2mm)	(35.0mm)	
"B" WIDTH	WEIGHT	HOSE CAPACITY				
6"	38 lb	200'	140'	100'	50'	N/A
(153 mm)	(18 kg)	(61 m)	(43 m)	(31 m)	(16 m)	
12"	46 lb	425'	300'	200'	100'	N/A
(305 mm)	(21 kg)	(130 m)	(91 m)	(61 m)	(31 m)	
18"	54 lb	625'	450'	325'	175'	100'
(458 mm)	(25 kg)	(191 m)	(137 m)	(99 m)	(54 m)	(31 m)
22"	58 lb	780'	550'	400'	225'	125'
(559 mm)	(27 kg)	(238 m)	(168 m)	(122 m)	(69 m)	(38 m)
27"	66 lb	1000'	700'	500'	275'	150'
(712 mm)	(30 kg)	(305 m)	(213 m)	(153 m)	(84 m)	(47 m)

Four 1/2 inch (12.7mm) diameter mounting holes

Note: Weights listed are for crank driven - Add for power driven, electric - all explosion proof 45 lb. (20.41 kg); 12 Volt D.C. 1/3 H.P. 30 lb. (13.61 kg); Air 6 AM 36 lb. (16.33 kg). * Note: capacity chart is reference only.

For all metric thread connections over 1/2" add the suffix number 70 to indicate BSPT threads - example CA33112 M70.

Hand Crank and Motor Driven

Series 30000 - 1/4", 1/2", 3/4", 1" I.D.

Reelcraft's Series 30000 reels are designed for rugged, heavy duty applications requiring long lengths of hose and large storage capacity. All-bolted unitized construction with no welds to fatigue. Full flow swivel and heavy gauge steel frame, spool and drum ensure longest service life.

Low pressure water

Long hose lengths ideal for grounds maintenance and more



Photo courtesy of DEMCO • Dethmers Manufacturing Company, Boyden, Iowa




Electric Motor

EA33112 L12D

CAUTION: To prevent drum damage, fully extend and pressurize hose, then wind on the reel. The 30000 series should always be wound under pressure.

Made in USA

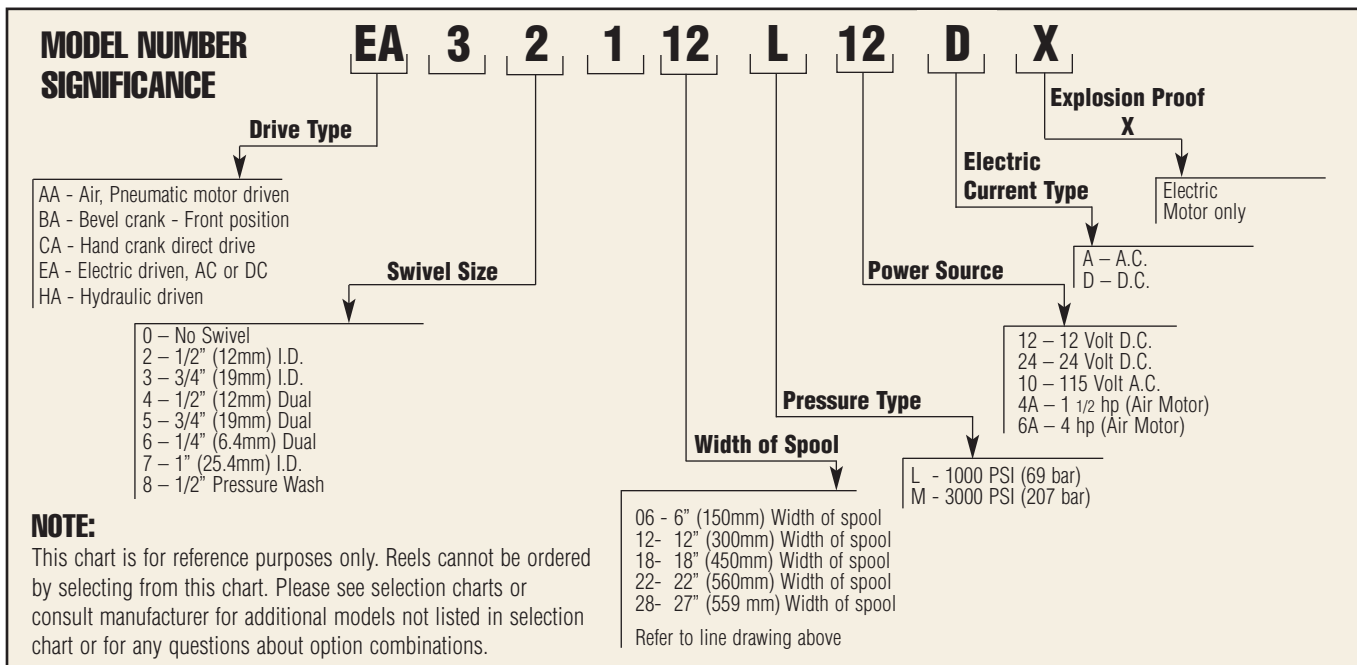

North America: 800-444-3134 Asia: +63 (45) 625-6624
 Europe: +44 (0) 1536 406999 Latin America: 260-489-1685

www.reelcraft.com



Wind Things Up With Reelcraft™