



POWER CORD & LIGHT REELS Series 4000 and 5000

LIGHT STYLE OPTIONS

Fluorescent Light

Style #2

- Durable shock absorbing lamp holder
- Shatter-resistant tube with switch



NEW!

Style #8 ▲

- One foot #16/3 conductor SJTOW-A yellow cord with molded NEMA 5-15P plug
- 120v-15amp receptacle is located in line on cord
- SAF-T-TIE keeps the light plugged into receptacle
- Scratch guard protects lamp cover
- For cord assembly only, order model 1 163 3 8

▼ Style #6

- Explosion Proof 13 watt fluorescent hand lamp
 - Automatic on/off switch at reel guide arm
 - Suitable for Class 1, group C and D locations
- Note: Reel is not explosion-proof.

Incandescent Hand Lamps

Style #5

- Rubber handle with vinyl-coated cage
- W/O switch or receptacle
- Automatic on/off switch at reel guide arm
- Complies with NEC #511-3.f., portable lighting equipment.
- Meets OSHA requirements.

Style #1 ▲

- Single receptacle tool tap
- Push-through switch
- Metal grounded guard.




L 4050 163 1

Note: Reel is not explosion proof

Five retractable light cord options

Illuminate your work area with incandescent, fluorescent or explosion-proof hand lamps

Made in USA

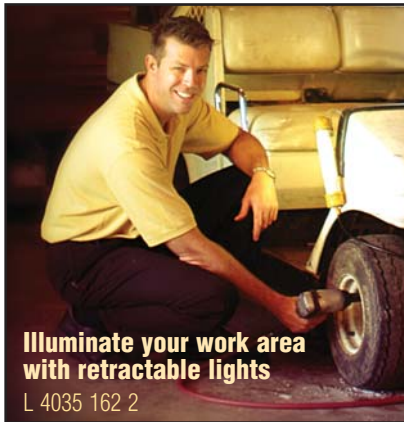

Illuminate your work area with retractable lights

L 4035 162 2

Auto-Switch Light Cord Reels

Models equipped with an automatic on/off switch incorporate a guide arm mounted switch that activates power with a pull of the cord.



L 5245 A 163 6X

LIGHT CORD REEL SELECTION CHART For indoor non-weather tight applications only

MODEL	ACCESSORY	CORD SPECIFICATIONS				VOLTS *	AMPS	WEIGHT	
		AWG / mm ²	No. Cond.	Length ft / m	Type			lbs / kg	
L 4035 163 1	*Incandescent	16 1.33	3	35 11	SJTOW	115	13	22	10
L 4050 163 1	*Incandescent	16 1.33	3	50 15	SJTOW	115	13	23	11
L 4035 A163 5**	*Incandescent	16 1.33	3	35 11	SJOW	115	15	25	12
L 5245 A163 6X**	Fluorescent	16 1.33	3	45 14	SEOW	115	0.3	32	15
L 4035 162 2	Fluorescent	16 1.33	2	35 11	SJTOW	115	0.3	23	11
L 4050 162 2	Fluorescent	16 1.33	2	50 15	SJTOW	115	0.3	24	11
L 4035 163 8	Fluorescent Light and Outlet	16 1.33	3	35 11	SJTO	115	10	26	11
L 4050 163 8	Fluorescent Light and Outlet	16 1.33	3	50 15	SJTO	115	10	27	12

* Incandescent bulb 75 watt maximum. All models UL listed at 115 Volt 60 HZ single phase. Base power cord reels without cord ends are suitable for 220 V. For indoor use only. See accessories page for optional mounting brackets and bases.

**Models are equipped with automatic on/off switch that activates power.

NOTE: Swing brackets should be used if cords are pulled at more than 45°, see page 49.



L 4035 162 2

North America: 800-444-3134 Asia: +63 (45) 625-6624
Europe: +44 (0) 1536 406999 Latin America: 260-489-1685

www.reelcraft.com



REELCRAFT

Wind Things Up With Reelcraft™