

HEAVY DUTY CORD REELS

Series 30000


Heavy Duty Cord and Cable Storage Reels Series 30000

Keep long lengths of expensive electrical cord off the ground and out of harm's way with Reelcraft's expanded Series 30000 line, which includes cable storage reels and live power cord. These reels are designed to handle long lengths of 10/3, 12/3 and 16/3 cable.

Reelcraft's Series 30000 storage reels and live power cord reels are constructed of heavy gauge steel and are assembled with vibration-proof, self-locking fasteners to ensure assembly integrity. They undergo a five-stage cleaning process and are individually powder-coated for the highest quality, corrosion-resistant paint adhesion. These reels are suited for indoor, non weather-tight applications only.

Cord/Cable Storage Reels

Cord and cable storage reels are used for storage, unwinding, and winding of conductive cord/cable. The reel is not intended to be live and the power source must be disconnected while reeling/de-reeling to avoid twisting the wires. Series 30000 cable storage reels are available in hand crank only.

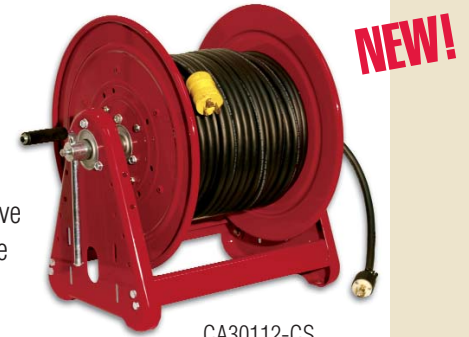

CA30112-CS
Cable not included.


Live Power Cord Reels

Live power cord reels have collector rings that allow the reel to wind/unwind the cord/cable with live current without twisting the wires. Live storage reels offer the advantage of using a reel as an effective piece of operating equipment rather than a simple device for the storage of cable or cord. Live Series 30000 power cord reels are available in direct hand crank, bevel gear crank or electric motor-driven rewind.



LE312 123 12D

Made in USA

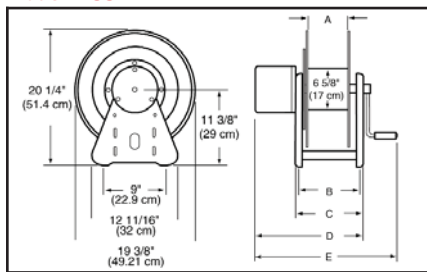

Four 1/2 inch (12.7mm) diameter mounting holes.

DIMENSIONS

	CA30106-CS		CA30112-CS		LB312 123 LB312 103		LC312 103 LC312 103		LE312 123 12D LE312 103 12D	
	in / mm		in / mm		in / mm		in / mm		in / mm	
A	6	153	12	305	12	305	12	305	12	305
B	9 3/4	248	15 3/4	400	15 3/4	400	15 3/4	400	15 3/4	400
C	11	28	17	432	17	432	17	432	17	432
D	N/A		N/A		23 3/4	603	23 3/4	603	23 3/4	603
E	19	483	25	635	29 1/4	743	29 3/8	746	25	635

SPECIFICATIONS

MODEL (without cable)	DRIVE TYPE	CORD SPECIFICATIONS				VOLTS	AMPS	WEIGHT		
		AWG / mm ²		No. Cond	Length ft / m			lbs	kg	
NEW CA30106-CS*	Hand Crank	10	5.37	3	225	69	This reel is for cable storage only. Not intended to be live.	40	19	
		12	3.32	3	270	82				
		16	1.33	3	845	258				
NEW CA30112-CS*	Hand Crank	10	5.37	3	455	138	This reel is for cable storage only. Not intended to be live.	46	21	
		12	3.32	3	545	166				
		16	1.33	3	1695	517				
NEW LB312 123	Bevel Crank	12	3.32	3	545	166	600	30	60	27
NEW LB312 103	Bevel Crank	10	5.37	3	455	138	600	30	60	27
NEW LC312 123	Hand Crank	12	3.32	3	200	62	600	30	50	23
NEW LC312 103	Hand Crank	10	5.37	3	200	62	600	30	50	23
NEW LE312 123 12D**	Motor Driven**	12	3.32	3	200	62	600	30	70	31
NEW LE312 103 12D**	Motor Driven**	10	5.37	3	200	62	600	30	70	31

NOTE: Cord must be fully unspooled before use. Actual fill capacities vary with cord O.D. and jacket type. Consult manufacturer for applications requiring cord types other than SO, SOW, or SJO. Reel suited for indoor, non-weather tight applications only. **Power source must be disconnected while reeling/de-reeling. Through shaft on cable storage reels facilitates cable sizes up to .969" O.D. for other sizes, consult manufacturer. **All motor driven models are 12 volt DC non-explosion proof. Other motor options available upon request.

North America: 800-444-3134 Asia: +63 (45) 625-6624
Europe: +44 (0) 1536 406999 Latin America: 260-489-1685

www.reelcraft.com



Wind Things Up With Reelcraft™