


Heavy Duty Power Cord Reels | Series L 4000 / L 5000 / L 7000 / L 70000



L 4050 163 3-RP

Ideal for mobile applications, including carts.

Reverse Plug



Made in USA 

Reverse Plug Power Cord Reels

Model with Cord	Cord Ending	Cord Specifications					Volts Amps		Shipping Weight		Size Index #	
		AWG	mm ²	# Cond.	ft	m	Type			lbs		kg
L 4035 163 3-RP	Outlet straight blade plug NEMA 5-15P, Inlet single receptacle NEMA 5-15R	16	1.33	3	35	11	SJTOW	125	13	25	11	1
L 4050 163 3-RP		16	1.33	3	50	15	SJE00W	125	13	26	12	1
L 4545 123 3-RP		12	3.32	3	45	14	SJE00W	125	15	28	13	1
L 5550 123 3-RP		12	3.32	3	50	15	SJE00W	125	15	44	20	3
L 70075 123 3-RP		12	3.32	3	75	23	SEOOW	125	15	70	32	5
L 70100 123 3-RP		12	3.32	3	100	30	SEOOW	125	15	74	34	5
L 4545 123 3A-RP	Outlet straight blade plug NEMA 5-20P, Inlet Single Receptacle NEMA 5-20R	12	3.32	3	45	14	SJE00W	125	20	28	13	1
L 5550 123 3A-RP		12	3.32	3	50	15	SJE00W	125	20	44	20	3
L 70075 123 3A-RP		12	3.32	3	75	23	SEOOW	125	20	70	32	5
L 70100 123 3A-RP		12	3.32	3	100	30	SEOOW	125	20	74	34	5
L 5750 103 4	RV plug NEMA TT-30P outlet, Flying lead inlet	10	5.37	3	50	15	SOOW	125	30	50	23	4

For indoor non-weathertight applications only. All models UL listed at 125 Volt 60 HZ single phase. See page 6 for guide arm positions. Swing brackets or pivot bases should be used if cords are pulled at more than 45°, see page 51.


Flying Lead Power Cord Reels



L 70100 123 X

SP **UL LISTED**

Cord End Specifications

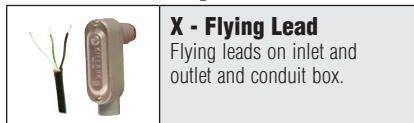

X - Flying Lead
Flying leads on inlet and outlet and conduit box.

Flying Lead Model with Cord	Model No Cord	Cord Specifications					Volts/ Amps	Volts/ Amps	Shipping Weight*		Size Index #	
		AWG	mm ²	# Cond.	ft	m			Type			
L 4025 163 X	L 4000	16	1.33	3	25	8	SJE00W	125/13	220/6.5	20	9	1
L 4035 163 X	L 4000	16	1.33	3	35	11	SJE00W	125/13	220/6.5	21	10	1
L 4050 163 X	L 4000	16	1.33	3	50	15	SJE00W	125/13	220/6.5	22	10	1
-----	L 4100	16	1.33	4	50	15	SJE00W	125/10	220/5	22	10	1
L 4525 123 X	L 4500	12	3.32	3	25	8	SJE00W	125/20	220/10	20	9	1
L 4545 123 X	L 4500	12	3.32	3	45	14	SJE00W	125/20	220/10	22	10	1
-----	L 5000	10	5.27	3	35	11	SO	125/30	220/15	29	13	2
-----	L 5400	12	3.32	3	35	11	SJE00W	125/13	220/6.5	25	11	2
L 5550 123 X	L 5500	12	3.32	3	50	15	SJE00W	125/20	220/10	35	16	3
L 70075 123 X	L 70075	12	3.32	3	75	23	SJE00W	125/20	220/10	69	31	6
L 70100 123 X	L 70100	12	3.32	3	100	30	SEOOW	125/20	220/10	73	33	6
L 5550 124 X	L 5500 124	12	3.32	4	50	15	SEOOW	-----	600/16	43	20	3
L 70100 124 X	L 70100 124	12	3.32	4	100	30	SEOOW	-----	600/16	75	34	6
L 5750 103 X	L 5700	10	5.27	3	50	15	SEOOW	125/30	220/15	37	17	4
-----	L 7000	6	13.3	4	35	11	SOOW	-----	220/45	41	19	7
L 7050 104 X	-----	10	5.27	4	50	15	SEOOW	-----	600/20	65	29	7

For indoor non-weathertight applications only. All models UL listed at 125/220 Volt 60 HZ single phase. *Weight of model without cord. Reference page 6 for guide arm positions. Swing brackets or pivot bases should be used if cords are pulled at more than 45°, see page 51.

Refer to page 41 for dimensional drawings.

Interactive Reel Catalog

Visit www.reelcraft.com/catalog for complete product specifications, available parts and accessories.

Visit reelcraft.com/quick-ship for a complete list of Quick Ship Reels - models that can be shipped same day when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.